


# Fingers

## Side Protection / Haulm fingers

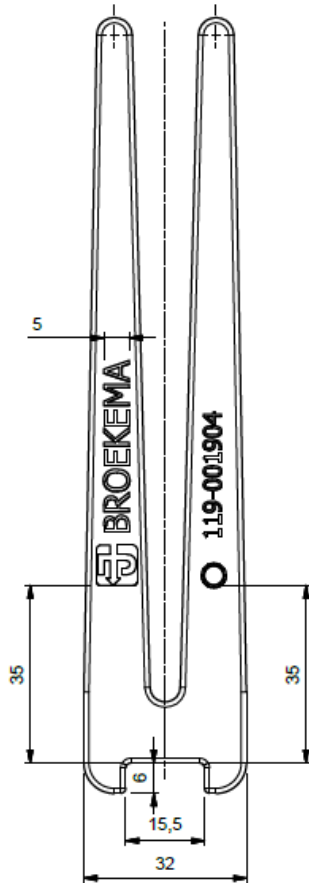

### POP-ON ACTIVE SIDE PROTECTION

- Connected to a 3<sup>rd</sup> hole in a rod, or;  
on a 3 hole plate.
  - Connected with Steel / Steel pop rivets
  - Can be used in combination with Rod conveyers and  
Lightweight (canvas) conveyers.
  - No Sprocket Run available
  - Material: PU
- 
- Minimum Pitch: 40 mm
  - Height: 150 mm
  - Width: 36 mm



**RUBBER**  
Haulm Finger 110 x 24  
(Inside 8mm)  
72° Shore A



**RUBBER**  
Haulm Finger 78 x 25  
(Inside 8mm)  
72° Shore A



**RUBBER**  
Haulm Finger 70 x 23/17,5  
(Inside 8mm)  
72° Shore A