


Fingers

Side Protection / Haulm fingers

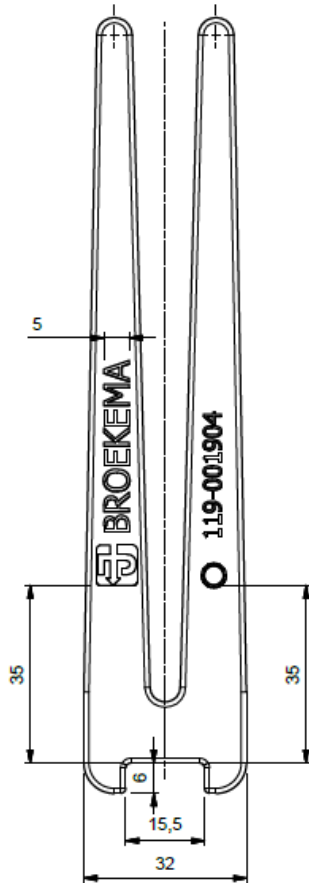

POP-ON ACTIVE SIDE PROTECTION

- Connected to a 3rd hole in a rod, or;
on a 3 hole plate.
- Connected with Steel / Steel pop rivets
- Can be used in combination with Rod conveyers and
Lightweight (canvas) conveyers.
- No Sprocket Run available
- Material: PU

- Minimum Pitch: 40 mm
- Height: 150 mm
- Width: 36 mm



RUBBER
Haulm Finger 110 x 24
(Inside 8mm)
72° Shore A



RUBBER
Haulm Finger 78 x 25
(Inside 8mm)
72° Shore A



RUBBER
Haulm Finger 70 x 23/17,5
(Inside 8mm)
72° Shore A