

Rods

Convexity / Cranking / Special rods / Stickmark

CONVEXITY DOWN



Standard for all webs with 2 traction belts.

CONVEXITY UP



Standard for all webs with 3 or more traction-belts, and webs with WB-clips on the centre belt(s).

CENTRAL CONVEXITY



On request



UP CRANK (K)	2 BELTS	3+ BELTS	SPROCKET RUN (X)
5 mm	Green	Green	Min. 30 mm
10 mm	Green	Green	Min. 30 mm
15 mm	Green	Green	Min. 30 mm
20 mm	Green	Green	Min. 30 mm
25 mm	Green	Red	Min. 30 mm
30 mm	Green	Red	Min. 30 mm
35 mm	Green	Red	Min. 30 mm
40 mm	Green	Red	Min. 30 mm
45 mm	Green	Red	Min. 30 mm
50 mm	Green	Red	Min. 30 mm

Other Crank sizes on request



DOWN CRANK (K)	2 BELTS	3+ BELTS	SPROCKET RUN (X)
5 mm	Green	Green	Min. 30 mm
10 mm	Green	Green	Min. 30 mm
15 mm	Green	Green	Min. 30 mm
20 mm	Green	Green	Min. 30 mm
25 mm	Green	Red	Min. 30 mm
30 mm	Green	Red	Min. 30 mm
35 mm	Green	Red	Min. 30 mm
40 mm	Green	Red	Min. 30 mm
45 mm	Red	Red	Red
50 mm	Red	Red	Red


Other Crank sizes on request

CRANKED UP RODS

CRANKED DOWN RODS

ROD MEASUREMENTS

- SM = Stickmark
- CTC = Centre to centre rivet holes
- WW = Web width
- BW = Belt width

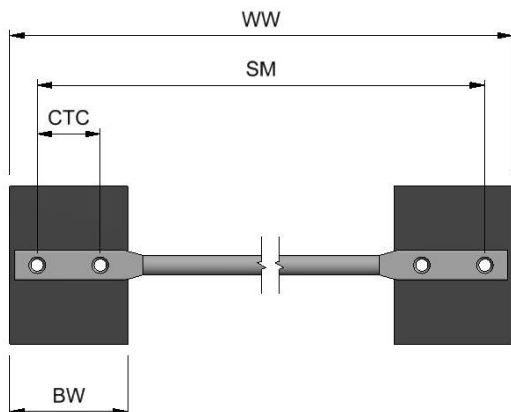

SQUARE MESH RODS / RODS WITH PINS

- On request > Production after approved drawing



REMARK: CRANKED TWIN RODS

- Only CRANKED DOWN: 5 | 6 | 7 | 8 | 9 | 10 mm
- No Sprocket Runs
- Not possible in combination with: Fiber Glass / Coated