



JÄGER

Umwelt-Technik


DATA SHEET

JETFLEX[®] SSD

Smart Strip Diffuser

DIMENSIONS

	A [mm]	B [mm]	Air feed [mm]	Height [mm]	Weight [kg]	Active area [m ²]	Airflow rate [m ³ /h]
SSD 1500	1680	1500	32	50	4,5	0,24	1,5 – 20
SSD 2000	2180	2000	32	50	6	0,32	2 – 26
SSD 2500	2680	2500	32	50	7,5	0,4	2,5 – 32
SSD 3000	3180	3000	32	50	9	0,48	3 – 38
SSD 3500	3680	3500	32	50	10,5	0,56	3,5 – 46
SSD 4000	4180	4000	32	50	12	0,64	4 – 52

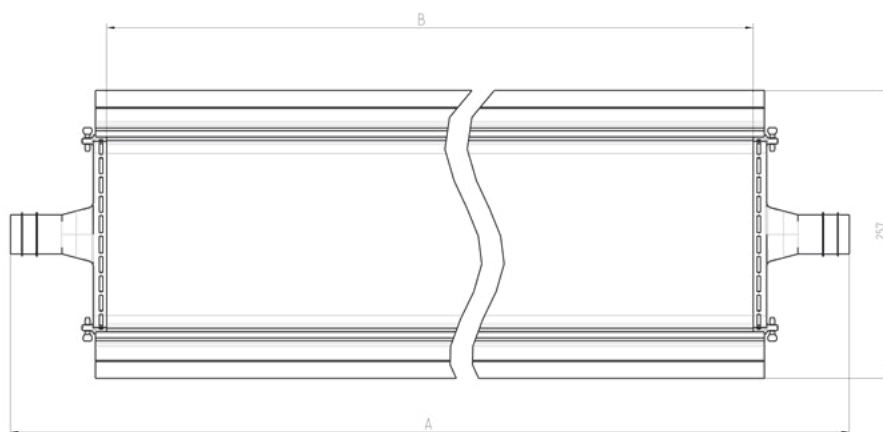

MATERIALIEN

Membrane
Polyurethane

Base profile
PVC regranulate

Air feed
Polyurethane

OPERATING CONDITIONS

Water temperature
< 35 °C

Air temperature
< 60 °C


Max. pressure loss
105 mbar

ACCESSORIES

Stainless steel clamp



PERFORMANCE DATA

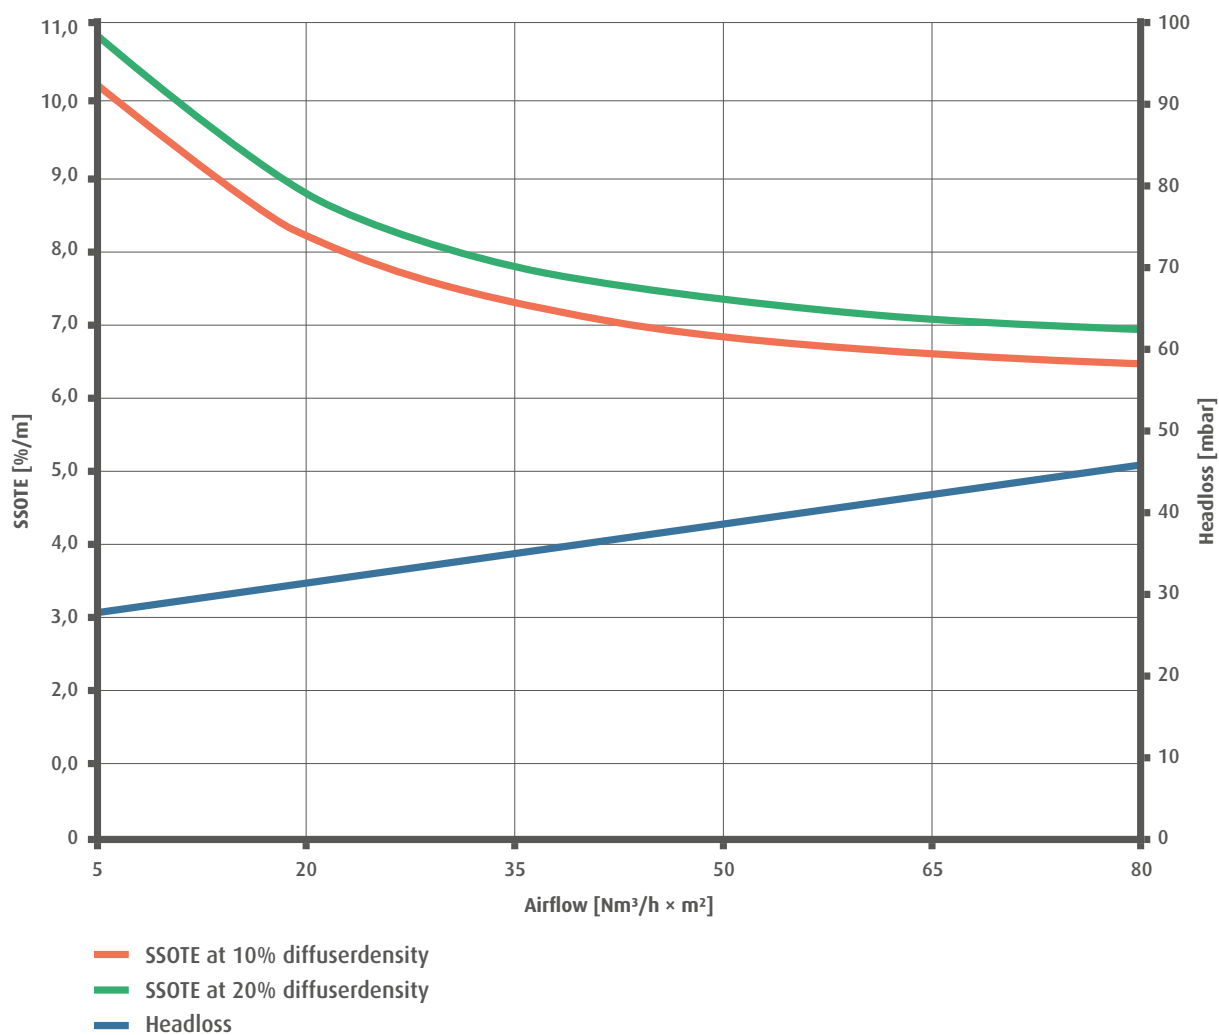

JETFLEX[®] SSD

CONTACT



Tel + 49 511 - 646 44 0
Fax + 49 511 - 646 44 499

info@jaeger-envirotech.com
www.jaeger-envirotech.com

Jäger Umwelt-Technik GmbH
Lohweg 1
30559 Hanover
Germany

Disclaimer

We exclude any liability for the information and product presentations provided. Contents of technical character are based on the date of publication. Existing copyrights and rights to the use of names remain unaffected.

Background graphic: Adobe Stock